


600V PVC-PVC 電纜

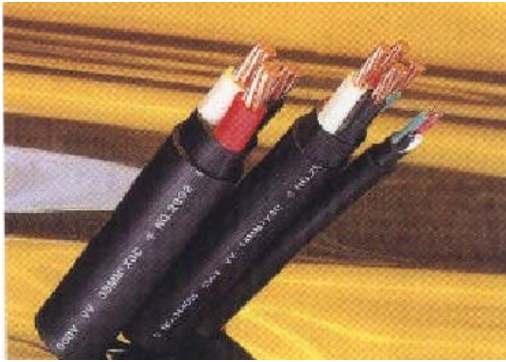

- 規格：參考 CNS 3301 或 JIS C 3342
- 用途：一般電路之配線
- 額定：600 V 以下
- 構造：導體- 圓形或圓形壓縮軟銅絞線
絕緣-PVC (一般為 60°C, 亦可參考 UL 1581 改為 75°C, 90°C, 105°C 材料等級)
被覆-PVC (一般為 60°C, 亦可參考 UL 1581 改為 75°C, 90°C, 105°C 材料等級)
- 識別- 1C:黑、2C:白、3C:紅、4C:綠

圓 型 單 芯	導 體			絕緣厚度	被覆厚度	最大 導體電阻 (20°C)	試驗電壓	最小 絕緣電阻 (20°C)	完成外徑 (約)
	標 稱	構 成	外 徑						
	截面積		(約)						
mm ²	No./mm	mm	mm	mm	Ω/km	kV/1 分	MΩ-km	mm	
1.25	7/0.45	1.35	2.3	—	16.5	1.5	50	6.0	
2.0	7/0.6	1.8	2.3	—	9.24	1.5	50	6.4	
3.5	7/0.8	2.4	2.3	—	5.20	1.5	50	7.0	
5.5	7/1.0	3.0	2.5	—	3.33	1.5	50	8.0	
8	7/1.2	3.6	2.7	—	2.31	1.5	50	9.0	
14	7/1.6	4.8	2.9	—	1.30	2.0	40	11.0	
22	7/2.0	6.0	3.1	—	0.824	2.0	40	12.5	
30	7/2.3	6.9	3.1	—	0.623	2.0	40	13.0	
38	7/2.6	7.8	3.1	—	0.487	2.5	40	14.5	
50		8.4	3.3	—	0.366	2.5	30	15.5	
60		9.3	3.3	—	0.305	2.5	30	16.0	
80	圓	10.7	3.5	—	0.229	2.5	30	18.0	
100		12.0	3.5	—	0.183	2.5	30	19.0	
125	形	13.5	3.7	—	0.146	3.0	30	21	
150		14.7	3.8	—	0.122	3.0	30	23	
200	壓	17.0	4.1	—	0.0915	3.0	20	26	
250		19.0	4.2	—	0.0739	3.0	20	28	
325	縮	21.7	4.5	—	0.0568	3.0	20	31	
400		24.1	4.6	—	0.0462	3.5	20	34	
500		26.9	4.9	—	0.0369	3.5	20	37	
圓 型 二 芯	1.25	7/0.45	1.35	0.8	1.5	16.8	1.5	50	9.0
	2.0	7/0.6	1.8	0.8	1.5	9.42	1.5	50	10.5
	3.5	7/0.8	2.4	0.8	1.5	5.30	1.5	50	11.5
	5.5	7/1.0	3.0	1.0	1.5	3.40	1.5	50	13.5
	8	7/1.2	3.6	1.2	1.5	2.36	1.5	50	15.5
	14	7/1.6	4.8	1.4	1.5	1.33	2.0	40	19.0
	22	7/2.0	6.0	1.6	1.6	0.840	2.0	40	22
	30	7/2.3	6.9	1.6	1.6	0.635	2.0	40	24
	38	7/2.6	7.8	1.8	1.7	0.497	2.5	40	27
	50		8.4	1.8	1.8	0.373	2.5	30	28
	60	圓	9.3	1.8	1.9	0.311	2.5	30	31
	80		10.7	2.0	2.0	0.234	2.5	30	34
	100	形	12.0	2.0	2.1	0.187	2.5	30	37
	125		13.5	2.2	2.2	0.149	3.0	30	41
	150	壓	14.7	2.2	2.3	0.124	3.0	30	44
	200		17.0	2.4	2.6	0.0933	3.0	20	50
	250	縮	19.0	2.4	2.7	0.0754	3.0	20	54
	325		21.7	2.6	3.0	0.0579	3.0	20	61

圓 型 三 芯	導 體			絕緣厚度	被覆厚度	最大 導體電阻 (20°C)	試驗電壓	最小 絕緣電阻 (20°C)	完成外徑 (約)
	標 稱	構 成	外 徑						
	截面積		(約)						
mm ²	No./mm	mm	mm	mm	Ω/km	kV/1 分	MΩ-km	mm	
1.25	7/0.45	1.35	0.8	1.5	16.8	1.5	50	9.5	
2.0	7/0.6	1.8	0.8	1.5	9.42	1.5	50	11.0	
3.5	7/0.8	2.4	0.8	1.5	5.30	1.5	50	12.5	
5.5	7/1.0	3.0	1.0	1.5	3.40	1.5	50	14.5	
8	7/1.2	3.6	1.2	1.5	2.36	1.5	50	16.5	
14	7/1.6	4.8	1.4	1.5	1.33	2.0	40	20	
22	7/2.0	6.0	1.6	1.6	0.840	2.0	40	24	
30	7/2.3	6.9	1.6	1.7	0.635	2.0	40	26	
38	7/2.6	7.8	1.8	1.8	0.497	2.5	40	29	
50		8.4	1.8	1.8	0.373	2.5	30	30	
60	圓	9.3	1.8	1.9	0.311	2.5	30	33	
80		10.7	2.0	2.1	0.234	2.5	30	37	
100	形	12.0	2.0	2.2	0.187	2.5	30	40	
125		13.5	2.2	2.3	0.149	3.0	30	44	
150	壓	14.7	2.2	2.5	0.124	3.0	30	47	
200		17.0	2.4	2.7	0.0933	3.0	20	53	
250	縮	19.0	2.4	2.9	0.0754	3.0	20	58	
325		21.7	2.6	3.1	0.0579	3.0	20	65	
圓 型 四 芯	1.25	7/0.45	1.35	0.8	1.5	16.8	1.5	50	10.5
	2.0	7/0.6	1.8	0.8	1.5	9.42	1.5	50	12.0
	3.5	7/0.8	2.4	0.8	1.5	5.30	1.5	50	13.5
	5.5	7/1.0	3.0	1.0	1.5	3.40	1.5	50	16.0
	8	7/1.2	3.6	1.2	1.5	2.36	1.5	50	18.0
	14	7/1.6	4.8	1.4	1.6	1.33	2.0	40	22
	22	7/2.0	6.0	1.6	1.7	0.840	2.0	40	27
	30	7/2.3	6.9	1.6	1.8	0.635	2.0	40	28
	38	7/2.6	7.8	1.8	1.9	0.497	2.5	40	32
	50		8.4	1.8	2.0	0.373	2.5	30	34
	60	圓	9.3	1.8	2.1	0.311	2.5	30	36
	80		10.7	2.0	2.2	0.234	2.5	30	41
	100	形	12.0	2.0	2.4	0.187	2.5	30	44
	125		13.5	2.2	2.5	0.149	3.0	30	49
	150	壓	14.7	2.2	2.7	0.124	3.0	30	52
	200		17.0	2.4	2.9	0.0933	3.0	20	59
	250	縮	19.0	2.4	3.1	0.0754	3.0	20	65
	325		21.7	2.6	3.4	0.0579	3.0	20	73

* 版權屬於華新麗華股份有限公司所有，非經授權不得擅自修改或複製。



總 公 司：台北市信義區松智路 1 號 25 樓
新 莊 廠：台北縣新莊市新樹路 397 號

TEL：(02) 87262211 FAX：(02) 27202234
業務專線 TEL：(02) 22029121 TEL：(02) 22025155
FAX：(02) 22025166