


耐熱電線電纜(HR-CV):

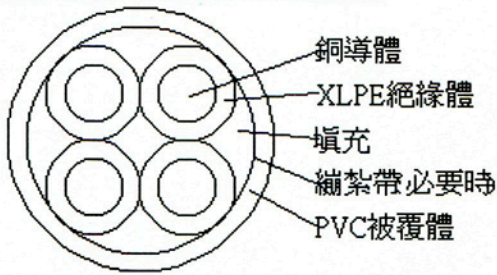

電纜構造:

導體：軟銅單線或軟銅絞線

※ 絕緣：交連聚乙烯(XLPE)材質

絞合：(多芯適用)

繃紮帶：必要時

※ 被覆：聚氯乙烯(PVC)材質

參考規範：消防署--耐熱電線電纜認可基準

標稱電壓：600V 以下

使用範圍：消防系統用線

芯數	導體			絕緣厚度 mm	被覆厚度 mm	最導體電大阻 Ω/km (20°C)	試驗電壓 KV/分	最絕緣電小阻 MΩ.km (20°C)	完成外徑 mm (約)	芯數	導體			絕緣厚度 mm	被覆厚度 mm	最導體電大阻 Ω/km (20°C)	試驗電壓 KV/分	最絕緣電小阻 MΩ.km (20°C)	完成外徑 mm (約)
	規格	構成	外徑								規格	構成	外徑						
1	0.65 mm	1/0.6 5	0.65	0.4	0.8	53.0	1.5/1	50	3.1	1	1.6 mm	1/1.6	1.6	0.5	0.8	9.01	1.5/1	50	4.2
2					1.0	53.0			4.9	1.0					9.01	7.2			
3					1.0	53.0			5.1	1.0					9.01	7.6			
4					1.0	53.0			5.5	1.0					9.01	8.3			
7					1.0	53.0			7.3	1.0					9.01	10.7			
10					1.0	53.0			8.7	1.0					9.01	13.3			
12					1.0	53.0			8.9	1.0					9.01	13.7			
24					1.0	53.0			11.6	1.3					9.01	19.1			
30					1.0	53.0			12.2	1.3					9.01	20.2			
1					0.9 mm	1/0.9			0.9	0.4					0.8	28.5			1.5/1
2	1.0	28.5	5.4	1.0			5.77	8.0											
3	1.0	28.5	5.7	1.0			5.77	8.5											
4	1.0	28.5	6.1	1.0			5.77	9.2											
7	1.0	28.5	8.0	1.0			5.77	11.9											
10	1.0	28.5	9.7	1.0			5.77	14.9											
12	1.0	28.5	10.0	1.0			5.77	15.4											
24	1.0	28.5	13.1	1.3			5.77	21.2											
30	1.0	28.5	13.8	1.3			5.77	27.7											
1	1.0 mm	1/1.0	1.0	0.5			0.8	23.1			1.5/1	50	3.6	1	1.25 mm ²	7/0.45	1.35	0.5	
2					1.0	23.1	6.0	1.0	16.8	6.0									
3					1.0	23.1	6.3	1.0	16.8	7.2									
4					1.0	23.1	6.8	1.0	16.8	7.8									
7					1.0	23.1	8.9	1.0	16.8	9.2									
10					1.0	23.1	10.9	1.0	16.8	11.6									
12					1.0	23.1	11.2	1.0	16.8	12.0									
24					1.0	23.1	14.9	1.1	16.8	16.6									
30					1.1	23.1	15.9	1.1	16.8	17.6									
1					1.2 mm	1/1.2	1.2	0.5	0.8	16.0			1.5/1	50					3.8
2	1.0	16.0	6.4	1.0					9.43	7.6									
3	1.0	16.0	6.7	1.0					9.43	8.0									
4	1.0	16.0	7.3	1.0					9.43	8.8									
7	1.0	16.0	9.5	1.0					9.43	10.4									
10	1.0	16.0	11.7	1.1					9.43	13.4									
12	1.0	16.0	12.0	1.1					9.43	13.8									
24	1.1	16.0	16.3	1.3					9.43	19.4									
30	1.1	16.0	17.2	1.4					9.43	20.8									



大亞電線電纜股份有限公司

總公司：台南縣關廟鄉中山路二段 249 號

TA YA ELECTRIC WIRE & CABLE CO.,LTD.

TEL: (06)595-3131

FAX: (06)595-8190